



Application

- Machine condition monitoring to ISO 20816-
- General vibration measurement in laboratory and industry
- Quality control

Properties

- Measurement of the RMS of vibration velocity or severity
- Precision shear type accelerometer with magnetic base
- Automatic detection of measuring points via the sensor base with electronic VMID measuring points
- Graphical trend display
- Memory for 16000 measurements
- USB interface
- PC software for measuring point management to MIMOSA convention (ISO 13373-1) and measuring data archiving
- Simple operation - no training required
- Brilliant, power-saving colored OLED display
- Economic AAA batteries or accumulators
- Pocket-sized

Technical Data

Measurement functions

Measurands	Vibration velocity/severity	
Overall values	True RMS value	
Measuring range velocity	0.1 to 1000	mm/s
Accuracy	±5 (±2 digits)	%
Analog-to-digital converter	24 bit	
Vibration trend	Graphical history of the saved vibration values	
Lower frequency limit velocity	10	Hz
Indication	OLED; RGB; 128 x 160 pixels	

Connectors

Input channels	1	
Input signals	Low power IEPE	
Input connector	Socket Binder 711; 3 pins	
IEPE constant current	1.9 to 2.9	mA
Digital interfaces	USB 2.0 FS; CGC mode; ASCII command set; Binder 712; 8 poles	

Power Supply

Battery	3 x LR03 / HR03 / AAA	
Battery operating time	8 to 12	h
External supply voltage	USB; 5	VDC

Case Data

Dimensions without connectors	125 x 65 x 27 (H x W x D)	mm
Case material	ABS	
Weight	140 (without sensor)	g
Operating temperature range	-20 to 60 (95 % rel. humidity without condensation)	

Scope of delivery


Accelerometer KS82L with spiral cable
USB cable
VMID measuring point sample
Carrying case

Optional accessories

VMID measuring points
sensor probe VM2x-T
PC software VM2x Measurement Data Base

Notice

Upon request, we offer an accredited calibration to DIN EN ISO/IEC 17025:2018.

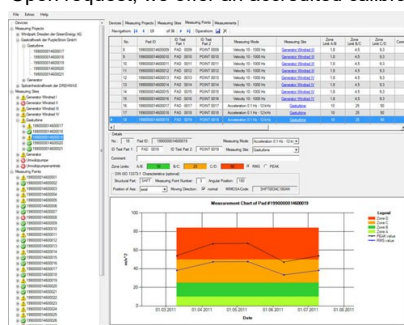

Metra Meß- und Frequenztechnik Radebeul GmbH & Co. KG

Meißner Str. 58a
01445 Radebeul
Tel. +49 (0)351 836 2191

Internet: www.MMF.de
Email: Info@MMF.de
Fax: +49 (0)351 836 2940

12.25

